

CILINDRO COMPACTO ISO 21287
ISO 21287 COMPACT CYLINDER




INDICE

INDEX

CILINDRO COMPACTO ISO 21287

ISO 21287 compact cylinder	3
Doble Efecto Magnético rosca hembra	
<i>Double Acting Magnetic female thread.....</i>	5
Doble Efecto Magnético rosca macho	
<i>Double Acting Magnetic male thread</i>	6
Doble efecto magnético vástago pasante con rosca hembra	
<i>Double Rod Magnetic steel Rod and Female thread.....</i>	7
Doble efecto magnético vástago pasante con rosca macho	
<i>Double Rod Magnetic steel Rod and malethread.....</i>	7
Accesorio y fijaciones ISO 21287	
<i>Fixing and accesries ISO 21287.....</i>	8

CILINDRO COMPACTO ISO 21287
ISO 21287 compact cylinder

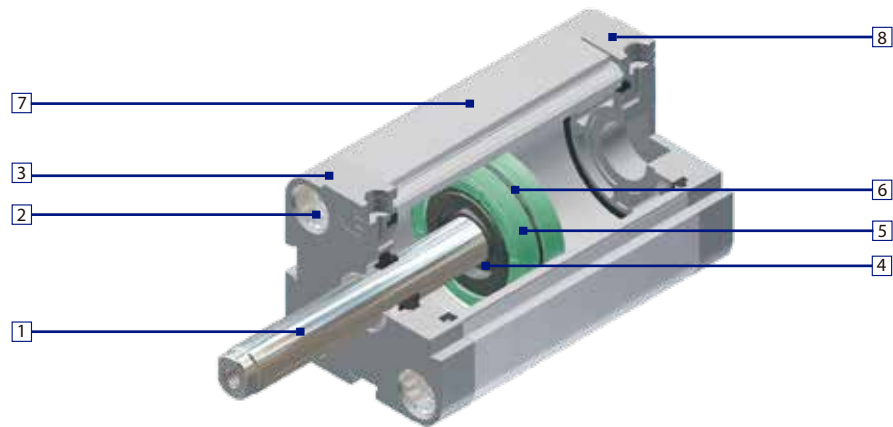

Lista de componentes
Parts list

Table with 5 columns: N°, Descripción / Description, Material / Material, N°, Descripción / Description, Material / Material. It lists 8 components including the piston rod, screws, head cover, piston, piston seal, magnetic ring, cylinder tube, and end cover with their respective materials.

Códigos
Order code

Table for order codes with columns for MGO, 32, M, 50, M, and Tipo de junta. It details various models (A, AE, AEX, AX, E, G, M, P) based on diameter, stroke, and seal type.

Ejemplo Código Cilindro compacto ISO 21287 Ø32 carrera 50
Order Code ISO 21287 Compact Cylinder Ø32 Stroke 50

COD: MGO 032 M 0050

Versión
Version



CILINDROS DE 12 A 100 DE DIAMETRO

Cylinder from 12 to 100 diameter



Características técnicas

Specifications

Características técnicas Specifications	Ø12	Ø16	Ø20	Ø25	Ø32	Ø40	Ø50	Ø63	Ø80	Ø100
Fluido Fluid	Aire filtrado, lubricado o sin lubricar Filtred lubricated or not lubricated air									
Fijaciones Mountings	ISO 21287									
Conexión Connections	M5			G 1/8"				G 1/4"		
Presión de trabajo Working pressure	= 1 ÷ 10 bar 2 ÷ 10 bar									
Temperatura ambiente Working temperature range	NBR: -20 ÷ 80°C / VITON: -20 ÷ +150°C									
Fuerza de trabajo de extensión (6bar) Thrust force (6bar)	7 Kg	12 Kg	18 Kg	29 Kg	47 Kg	75 Kg	120 Kg	187 Kg	302 Kg	302 Kg
Fuerza de trabajo de retracción (6bar) Traction force (6bar)	4 Kg	9 Kg	14 Kg	25 Kg	41,4 Kg	68 Kg	107,7 Kg	174 Kg	282 Kg	450,3 Kg
Vida útil (en condiciones de trabajo adecuadas) Life (if properly used)	4000 km					5000 km				
Peso [gr] (C=0 peso 1mm CxC) Weight [gr] (C=0 weight 1mm CxC)		64+1,6xC	80+2xC	100+3xC	140+3,35xC	158+3,4xC	269+5,15xC	411+6,2xC	822+8,2xC	1714-10xC

Consumo x 10mm carrera (6bar)

Consumption x 10mm stroke (6bar)





	Ø16	Ø20	Ø25	Ø32	Ø40	Ø50	Ø63	Ø80	Ø100
q _s	14x10 ⁻³ NI/min	22x10 ⁻³ NI/min	34x10 ⁻³ NI/min	56x10 ⁻³ NI/min	87x10 ⁻³ NI/min	135x10 ⁻³ NI/min	187x10 ⁻³ NI/min	350x10 ⁻³ NI/min	550x10 ⁻³ NI/min
q _t	10,6x10 ⁻³ NI/min	12,7x10 ⁻³ NI/min	29x10 ⁻³ NI/min	48x10 ⁻³ NI/min	74x10 ⁻³ NI/min	115x10 ⁻³ NI/min	170x10 ⁻³ NI/min	320x10 ⁻³ NI/min	515x10 ⁻³ NI/min

Carrera estándar

Standar stroker

Ø (mm)	Carrera / Stroker																								Max. Carrera Max. Stroker
Ø12	5 10 15 20 25 30 35 40 45 50																								... 3000
Ø16	5 10 15 20 25 30 35 40 45 50 55 60 70 75																								
Ø20	5 10 15 20 25 30 35 40 45 50 55 60 70 75 80 90 100																								
Ø25	5 10 15 20 25 30 35 40 45 50 55 60 70 75 80 90 100 110 120 125 150																								
Ø32	5 10 15 20 25 30 35 40 45 50 55 60 70 75 80 90 100 110 120 125 150 160 175 200																								
Ø40	5 10 15 20 25 30 35 40 45 50 55 60 70 75 80 90 100 110 120 125 150 160 175 200																								
Ø50	5 10 15 20 25 30 35 40 45 50 55 60 70 75 80 90 100 110 120 125 150 160 175 200 225 250																								
Ø63	5 10 15 20 25 30 35 40 45 50 55 60 70 75 80 90 100 110 120 125 150 160 175 200 225 250																								
Ø80	5 10 15 20 25 30 35 40 45 50 55 60 70 75 80 90 100 110 120 125 150 160 175 200 225 250 275 300																								
Ø100	5 10 15 20 25 30 35 40 45 50 55 60 70 75 80 90 100 110 120 125 150 160 175 200 225 250 275 300																								

Doble Efecto Magnético rosca hembra
Double Acting Magnetic female thread

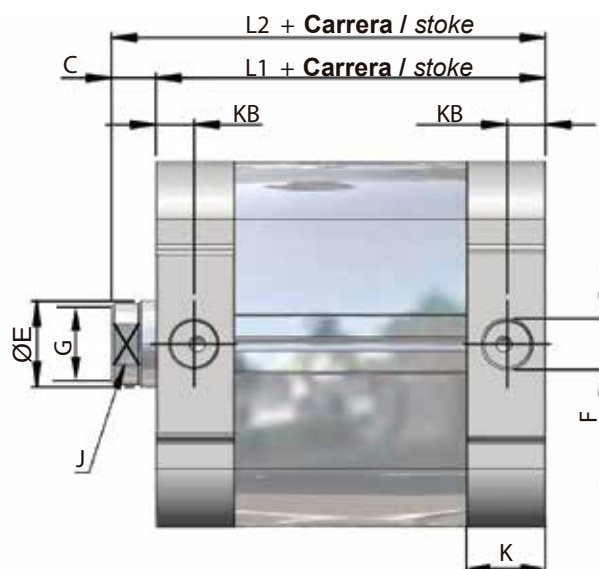
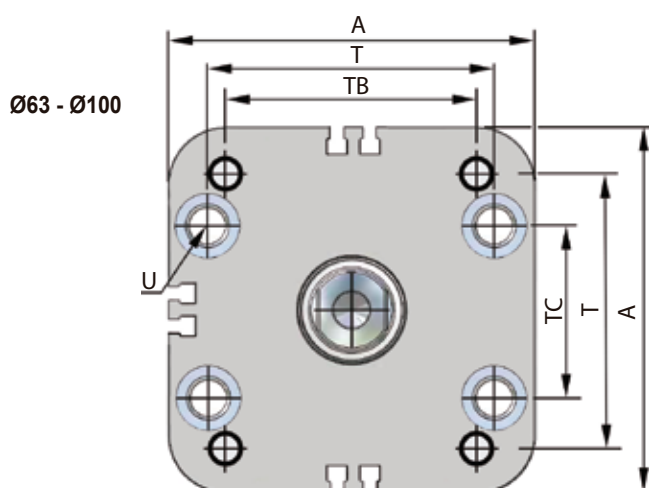
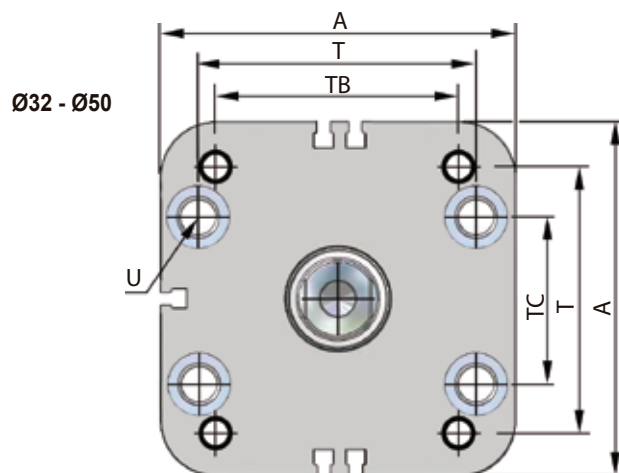
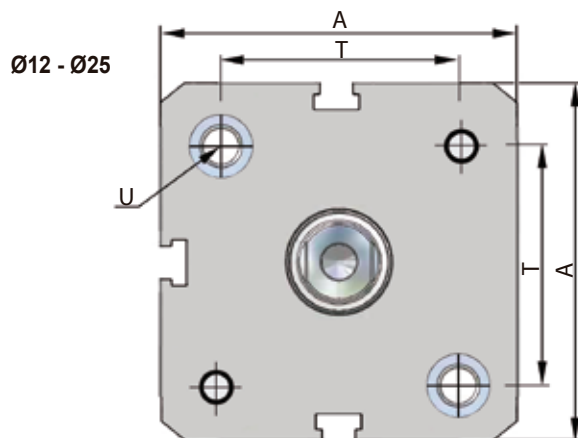


Ø	A	C	ØE	F	G	J	K	KB	L1	L2	T	TB	TC	U
12	27,5	5	6	M5	M3	5	10,5	6	35	40	16	-	-	M4
16	29	5	8	M5	M4	7	11	6	35	40	18	-	-	M4
20	35,5	6	10	M5	M6	8	12	6	37	43	22	-	-	M5
25	39,5	6	10	M5	M6	8	12	6	39	45	26	-	-	M5
32	47,5	5	12	G 1/8"	M8	10	15	7,5	45	50	32,5	38	17	M6
40	56,5	6	12	G 1/8"	M8	10	14,5	7,25	45	51	38	45	21	M6
50	66,5	8	16	G 1/8"	M10	14	14,5	7,25	45	53	46,5	54	27	M8
63	79,5	7	16	G 1/8"	M10	14	14,5	7,25	50	57	56,5	66	37	M8
80	100	8	20	G 1/8"	M12	17	16	9	55	63	50	84	47	M10
100	120	9	20	G 1/4"	M12	17	19,5	9,75	67	76	57	101	60	M10

Para otras versiones consultar dept. comercial

For other versions, please ask our sales dept.

Doble Efecto Magnético rosca macho
Double Acting Magnetic male thread

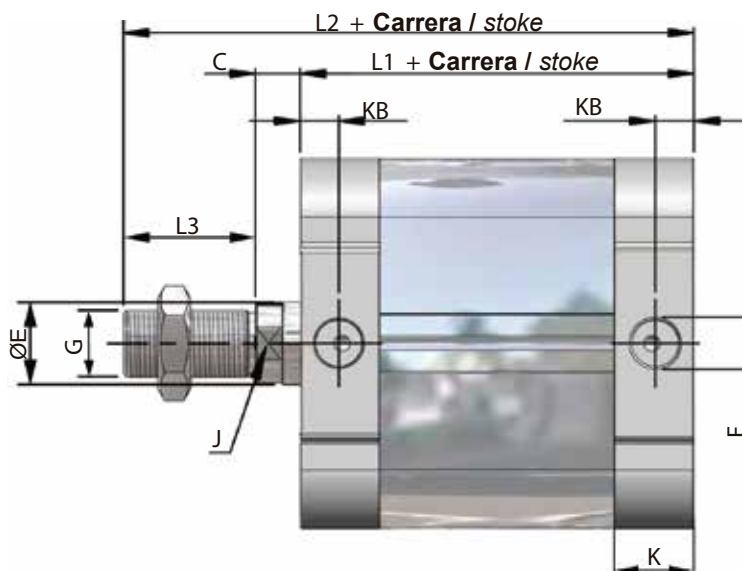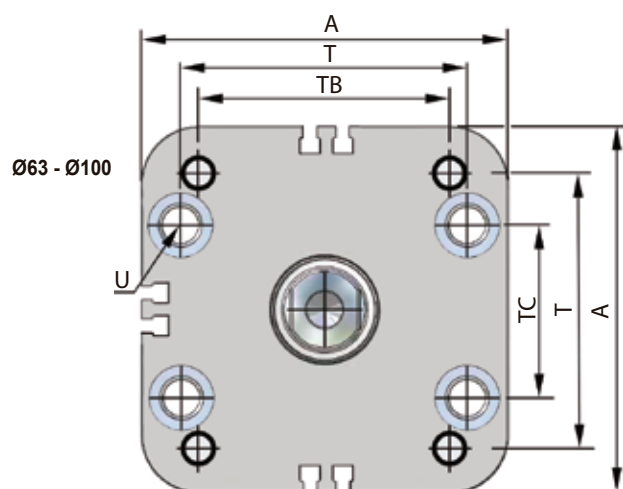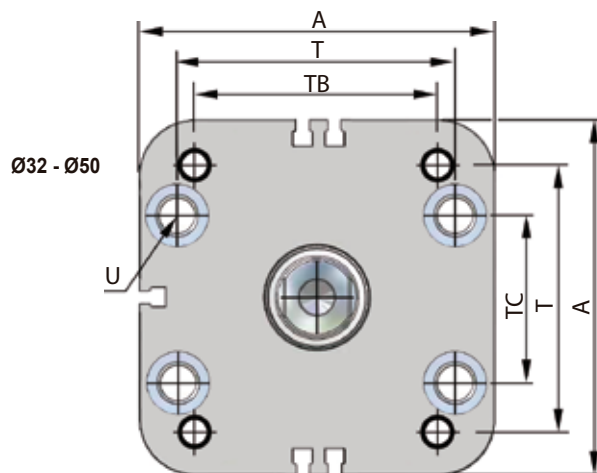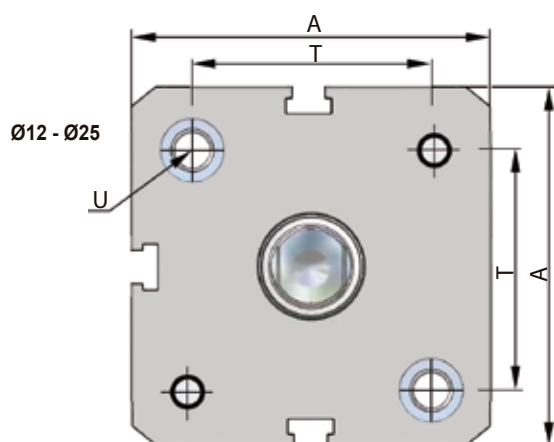


Ø	A	C	ØE	F	G	J	K	KB	L1	L2	L3	T	TB	TC	U
12	27,5	5	6	M5	M5	5	12	6	35	50	10	16	-	-	M4
16	29	5	8	M5	M6	7	12	6	35	52	12	18	-	-	M4
20	35,5	6	10	M5	M8	8	12	6	37	59	16	22	-	-	M5
25	39,5	6	10	M5	M8	8	12	6	39	61	16	26	-	-	M5
32	47,5	5	12	G 1/8"	M10x1,25	10	15	7,5	45	69	19	32,5	38	17	M6
40	56,5	6	12	G 1/8"	M10x1,25	10	14,5	7,25	45	70	19	38	45	21	M6
50	66,5	8	16	G 1/8"	M12x1,25	14	14,5	7,25	45	75	22	46,5	54	27	M8
63	79,5	7	16	G 1/8"	M12x1,25	14	14,5	7,25	50	79	22	56,5	66	37	M8
80	100	8	20	G 1/8"	M16x1,5	17	16	9	55	91	28	50	84	47	M10
100	120	9	20	G 1/4"	M16x1,5	17	19,5	9,75	67	104	28	57	101	60	M10

Para otras versiones consultar dept. comercial

For other versions, please ask our sales dept.


Doble efecto magnético vástago pasante con rosca hembra
Double Rod Magnetic steel Rod and Female thread.

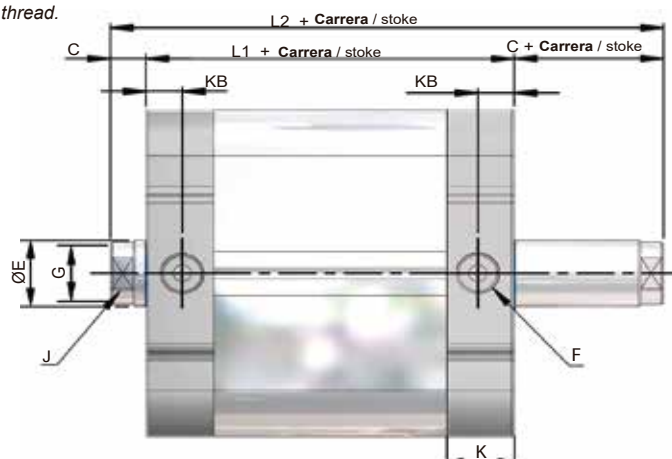

Ø	C	ØE	F	G	J	K	KB	L1	L2
12	5	6	M5	M3	5	10,5	6	35	45
16	5	8	M5	M4	7	11	6	35	45
20	6	10	M5	M6	8	12	6	37	49
25	6	10	M5	M6	8	12	6	39	51
32	5	12	G 1/8"	M8	10	15	7,5	45	55
40	6	12	G 1/8"	M8	10	14,5	7,25	45	57
50	8	16	G 1/8"	M10	14	14,5	7,25	45	61
63	7	16	G 1/8"	M10	14	14,5	7,25	50	64
80	8	20	G 1/8"	M12	17	16	9	55	70
100	9	20	G 1/4"	M12	17	19,5	9,75	67	85



Doble efecto magnético vástago pasante con rosca macho
Double Rod Magnetic steel Rod and male thread.

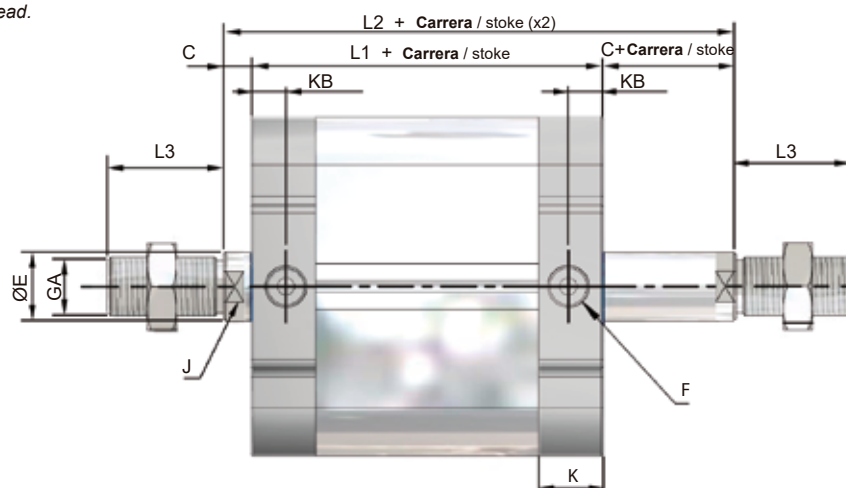

Ø	C	ØE	F	GA	J	K	KB	L1	L2	L3
12	5	6	M5	M5	5	12	6	35	45	10
16	5	8	M5	M6	7	12	6	35	45	12
20	6	10	M5	M8	8	12	6	37	49	16
25	6	10	M5	M8	8	12	6	39	51	16
32	5	12	G 1/8"	M10x1,25	10	15	7,5	45	55	19
40	6	12	G 1/8"	M10x1,25	10	14,5	7,25	45	57	19
50	8	16	G 1/8"	M12x1,25	14	14,5	7,25	45	61	22
63	7	16	G 1/8"	M12x1,25	14	14,5	7,25	50	64	22
80	8	20	G 1/8"	M16x1,5	17	16	9	55	70	28
100	9	20	G 1/4"	M16x1,5	17	19,5	9,75	67	85	28



□ Para otras versiones consultar dept. comercial


□ For other versions, please ask our sales dept.

ACCESORIOS Y FIJACIONES ISO 21287

Fixing and Accesories ISO 21287

Pata fijación


Axial foot

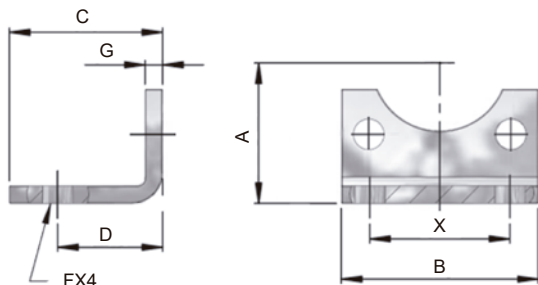

Código/Code	Ø cilindro	A	B	C	D	ØF	G	X
KD001676	12	21	25	18	13	5,5	3	16
KD001677	16	22	27	17,8	13	5,5	3	18
KD001678	20	27	34	22,3	16	6,5	3,8	22
KD001679	25	29	38	22,3	16	6,5	3,8	26
KD001680	32	33,5	48	22,3	16	7	4	32
KD001681	40	38	54	26	18	10	4	36
KD001682	50	45	65	29	21	10	5	45
KD001683	63	50	75	29	21	10	5	50
KD001684	80	63	95	36,5	26	12	6	63
KD001685	100	74	112	39,5	27	14	6	75

Horquilla


Rod clevis

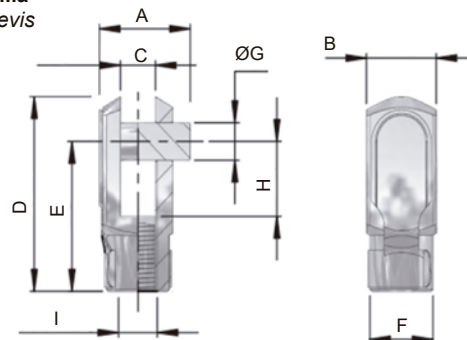

Código/Code	A	B	C	D	E	F	ØG	H	I
FOR6	16	12	6	31	24	10	6	12	M6X1,00
FOR8	22	20	8	42	32	14	8	16	M8X1,25
FOR10	26	24	10	52	40	18	10	20	M10X1,25
FOR10	26	20	10	52	40	18	10	20	M10X1,25
FOR12	27	24	12	62	48	20	12	24	M12X1,25
FOR16	38	32	16	83	64	26	16	32	M16X1,50
FOR16	38	32	16	83	64	26	16	32	M16X1,50
FOR20	47	40	20	105	80	34	20	40	M20X1,50
FOR20	47	40	20	105	80	34	20	40	M20X1,50

Rótula


Universal joint

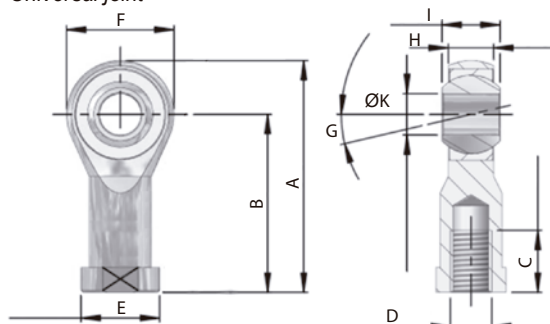

Código/Code	A	B	C	D	E	F	G	H	I	ØK
KD000003	40	30	30	M6X1,00	10	20	13	6,8	9	6
KD000004	48	36	36	M8X1,25	10	24	13	9	12	8
KD000005	56	43	43	M10X1,25	11	26	13	11	14	10
KD000005	56	43	20	M10X1,25	17	26	13	11	14	10
KD000006	66	50	22	M12X1,25	19	32	13	12	16	12
KD000007	84	64	28	M16X1.5	22	40	15	15	21	16
KD000007	84	64	28	M16X1.5	22	40	15	15	21	16
KD000008	100	77	33	M20X1.5	30	46	15	18	25	20
KD000008	100	77	33	M20X1.5	30	46	15	18	25	20

Placa fijación

Rod flange

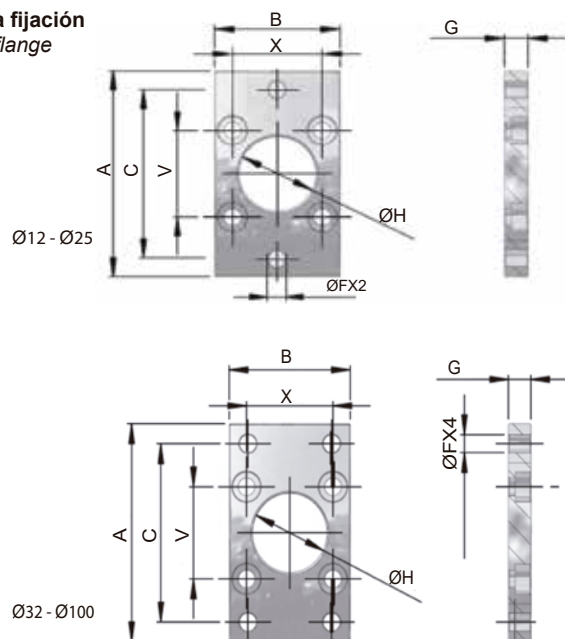

Código/Code	Ø cilindro	A	B	C	ØF	G	ØH	X
KD001656	12	55	25	40	5,5	8	10	-
KD001657	16	55	30	43	5,5	8	10	-
KD001658	20	68	35	55	6,6	8	16	-
KD001659	25	76	39,5	60	6,6	8	16	-
KD001660	32	80	47	64	7	10	30,5	32
KD001661	40	90	53	72	9	10	35,5	36
KD001662	50	108	65	90	9	12	40,5	45
KD001663	63	118	75	100	9	12	45,5	50
KD001664	80	150	95	126	12,5	16	45,5	63
KD001665	100	176	115	150	14,5	16	55,5	75


■ Para otros diámetros y otros modelos consultar dept. comercial

■ For other diameters and figures, please ask our sales dept.

ACCESORIOS Y FIJACIONES ISO 21287


Fixing and Accesories ISO 21287

Charnela hembra con perno Double clevis pivot bracket

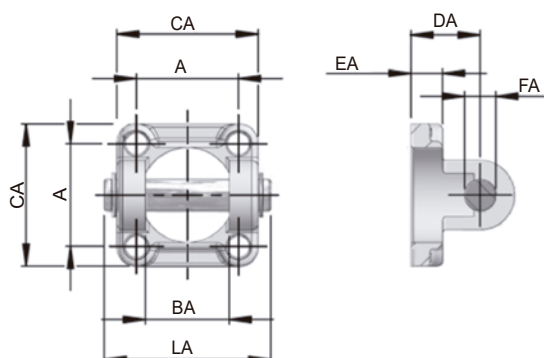


Código/Code	Ø cilindro	A	BA	CA	DA	FA	LA
KD001600	32	89	76	32	33,5	44	48
KD001601	40	97,5	81,5	36	38	45,5	54
KD001602	50	103,5	87,5	45	45	45,5	65
KD001603	63	107	91	50	50	49	75
KD001604	80	127	106	63	63	54	95
KD001605	100	146	121	75	74	67	112

Charnela macho Single clevis

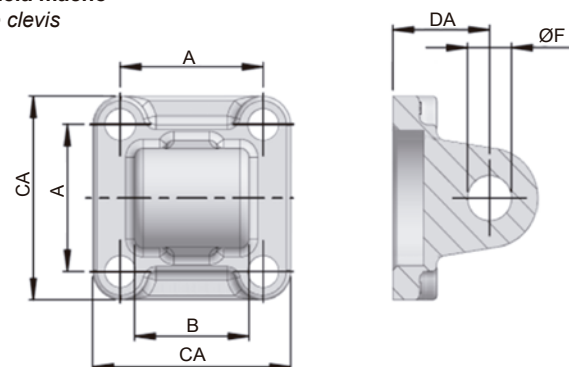


Código/Code	Ø cilindro	A	B	CA	DA	ØF
KD001616	12	16	11,9	24	16	6
KD001617	16	18	11,9	28,5	16	6
KD001618	20	22	15,9	34,5	20	8
KD001619	25	26	15,9	38,5	20	8
KD001620	32	32,5	25,8	46,5	22	10
KD001621	40	38	27,8	54	25	12
KD001622	50	46,5	31,7	64	27	12
KD001623	63	56,5	39,7	75	32	16
KD001624	80	72	49,7	93	36	16
KD001625	100	89	59,7	110	41	20

Charnela hembra Swivel flange

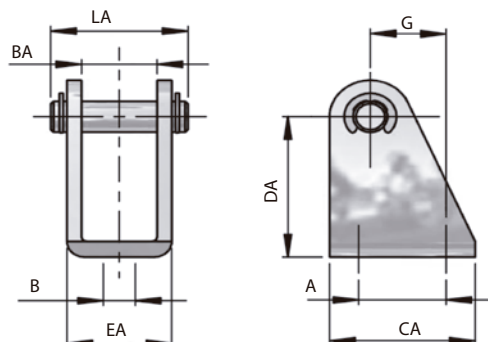


Código/Code	Ø cilindro	A	B	BA	CA	DA	EA	G	L
KD001021	12	15	5,5	12,1	25	27	18,1	13	28
KD001021	16	15	5,5	12,1	25	27	18,1	13	28
KD001022	20	20	7	16,1	32	30	24,1	16	38
KD001022	25	20	7	16,1	32	30	24,1	16	38

Soporte lateral 90° estrecho Clevis pivot bracket strait

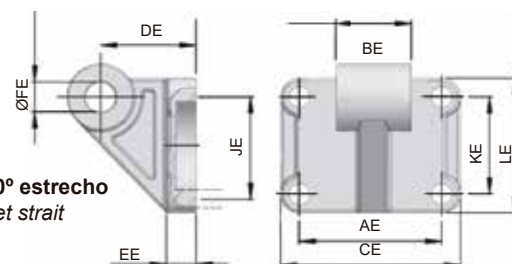

Código/Code	Ø cilindro	AE	BE	CE	DE	EE	ØFE	JE	KE	LE
KD001550A	32	38	26	50	32	8	10	18	18	30
KD001551A	40	41	28	53	36	10	12	22	22	34
KD001552A	50	50	32	64	45	12	12	30	30	44
KD001553A	63	52	40	66	50	12	16	35	35	49
KD001554A	80	66	50	85	63	14	16	40	40	59
KD001555A	100	76	60	95	71	15	20	50	50	69
KD001556A	125	94	70	122	90	20	25	60	60	88

Soporte lateral 90° cuadrado Clevis pivot bracket square

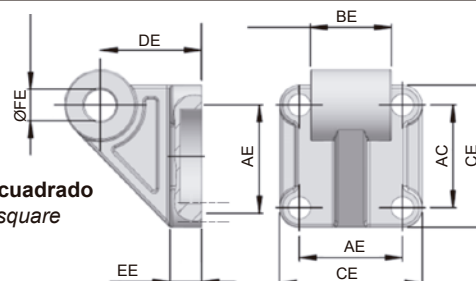

Código/Code	Ø cilindro	AE	BE	CE	DE	EE	ØFE
KD001550	32	32.5	26	45	32	10	10
KD001551	40	38	28	52	36	10	12
KD001552	50	46.5	32	65	45	12	12
KD001553	63	56.5	40	75	50	12	16
KD001554	80	72	50	95	63	16	16
KD001555	100	89	60	115	73	16	20

■ Para otros diámetros y otros modelos consultar dept. comercial

■ For other diameters and figures, please ask our sales dept.



García Marín System, S.L.

Tel.+34 93 785 42 45

gm@gmsystem.net · www.gmsystem.net

P.I. Can petit c/Puigbarral nº34 nave i
08227 Terrassa - Barcelona (Spain)